

Fig. 1.

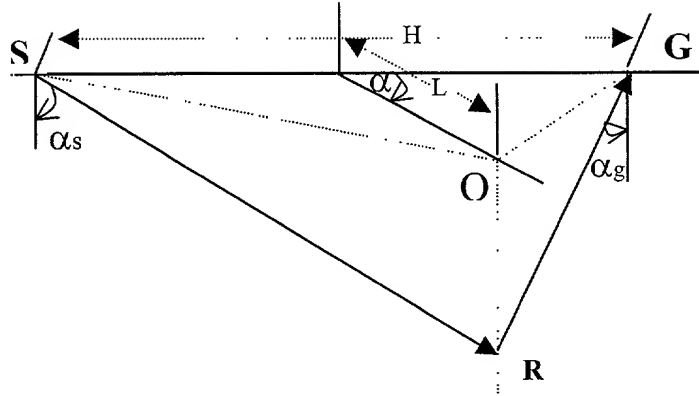


Fig. 2. A reflector point R is specified in the macro-velocity model. The travel-time is computed to R from all source points S and from all receiver points G .

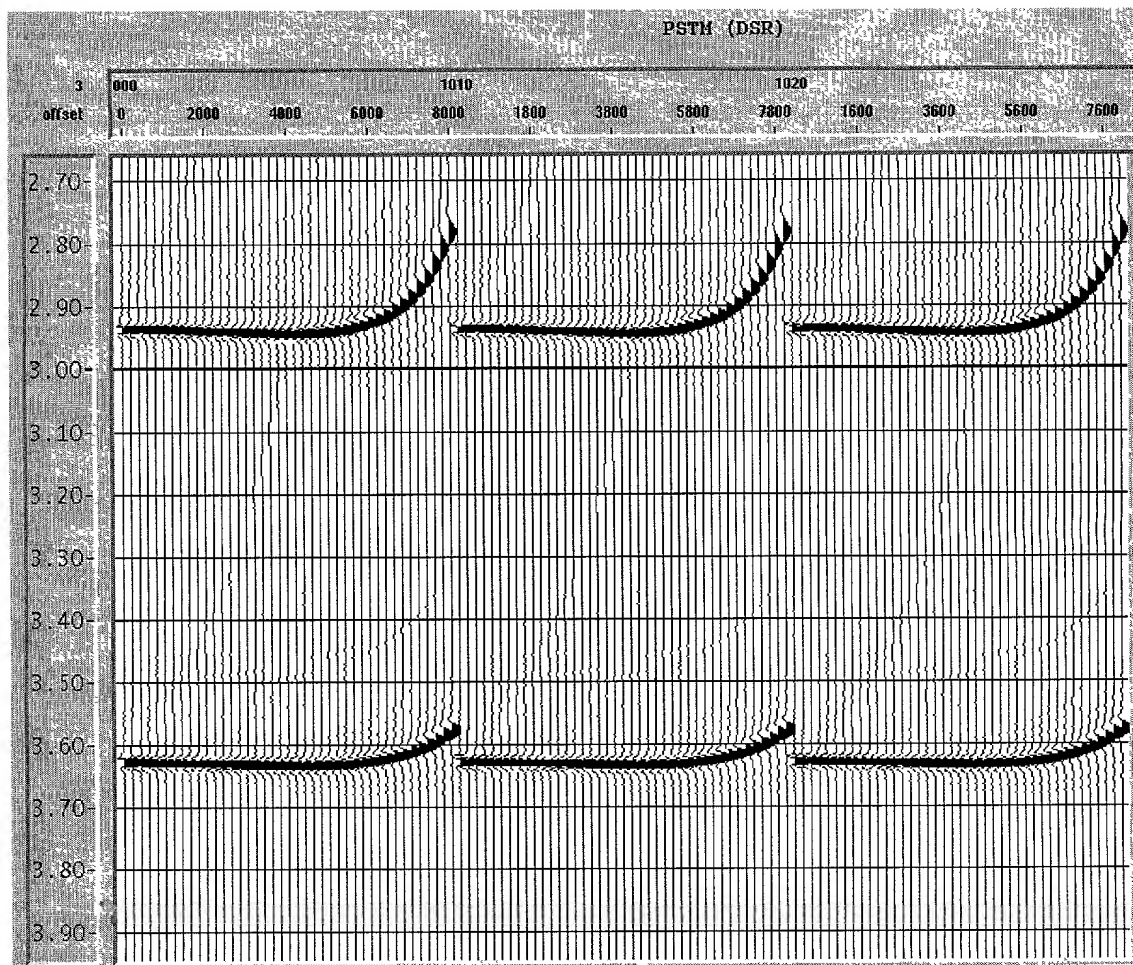


Fig. 3..

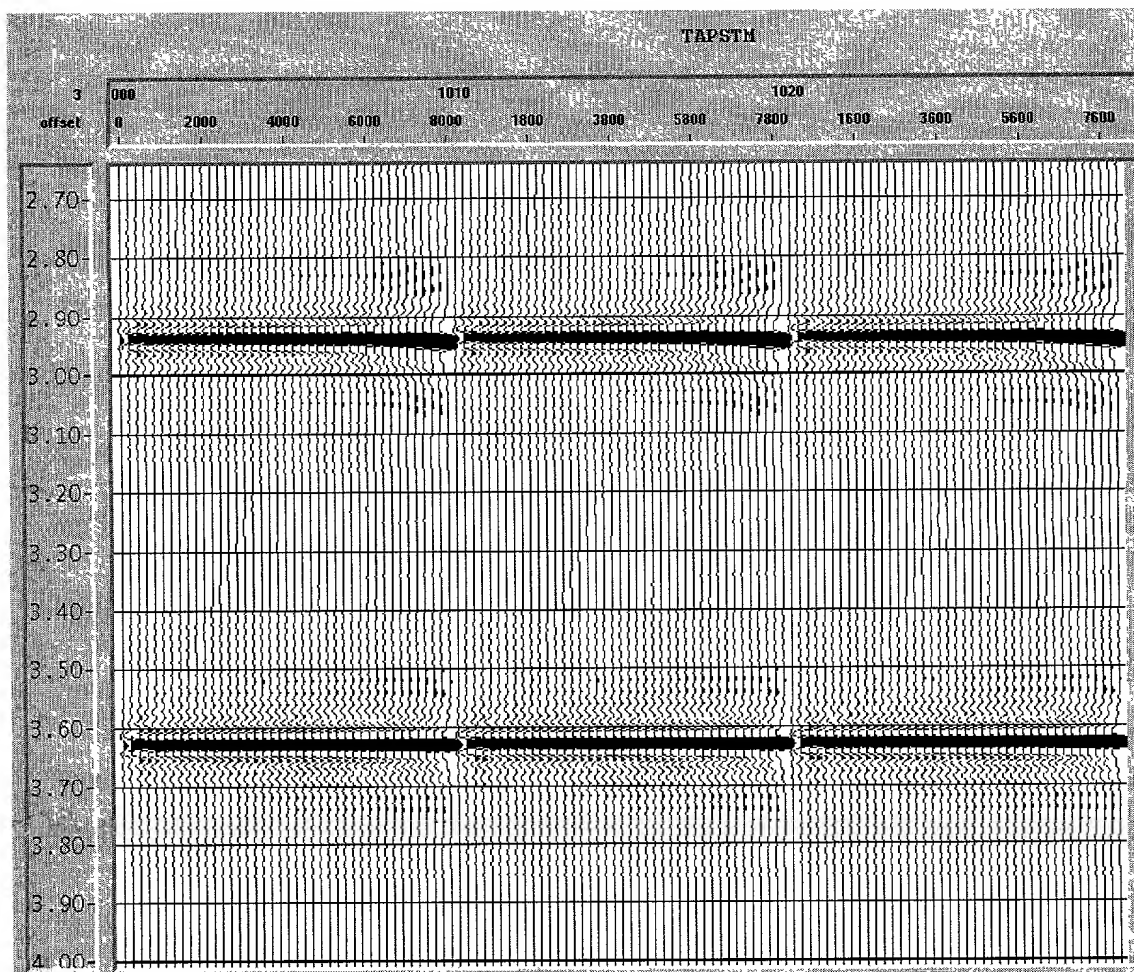


Fig. 4.

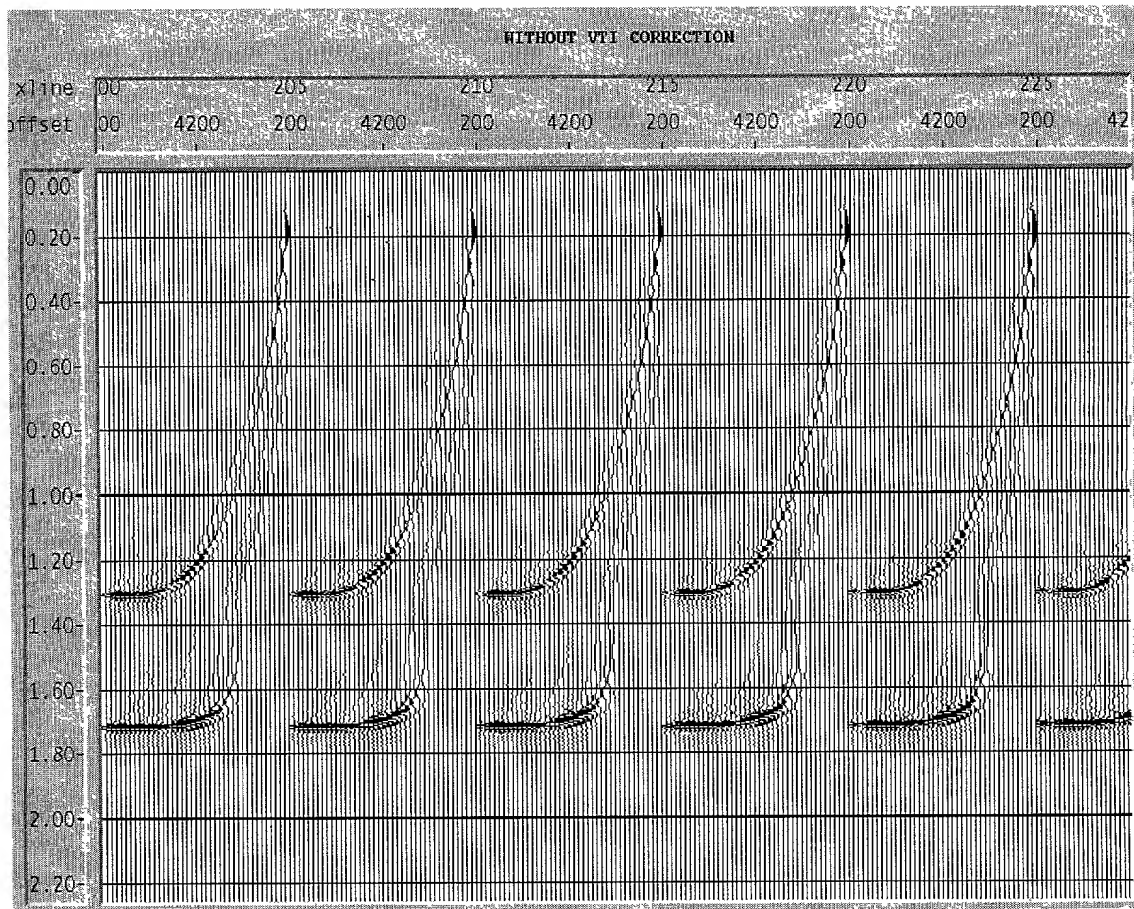


Fig. 5.

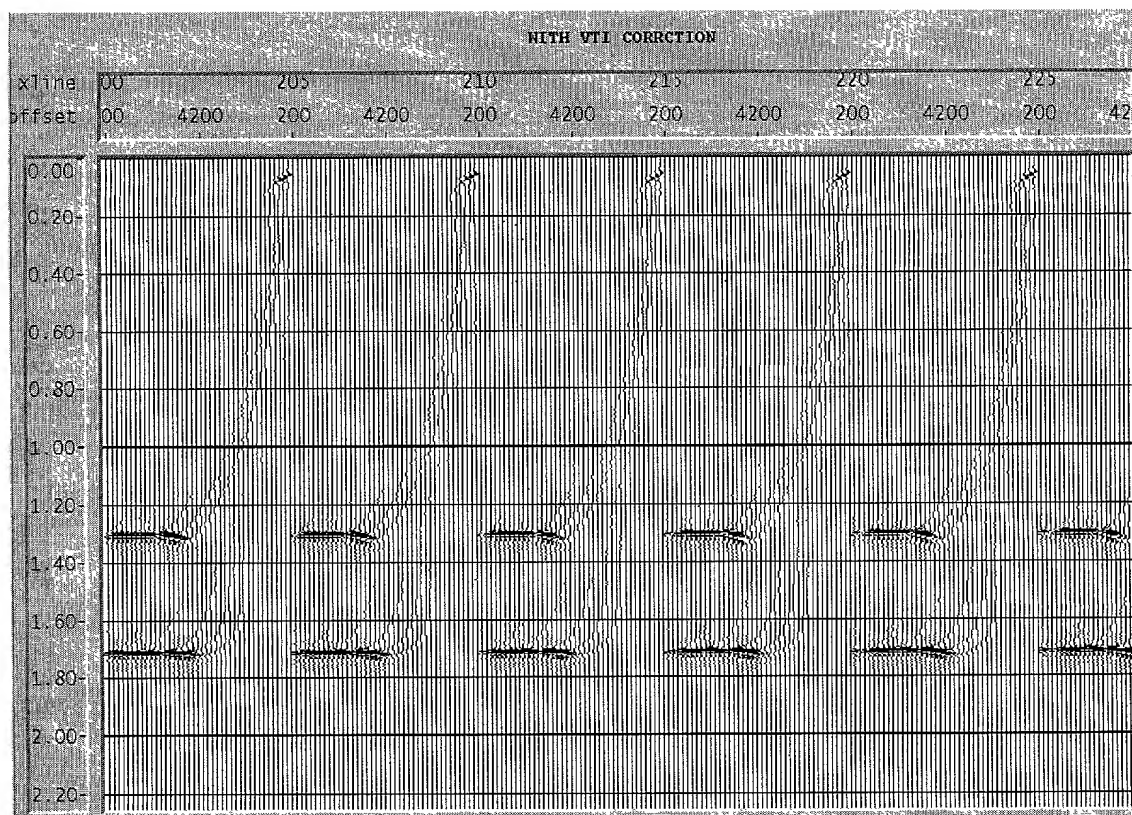


Fig. 6.

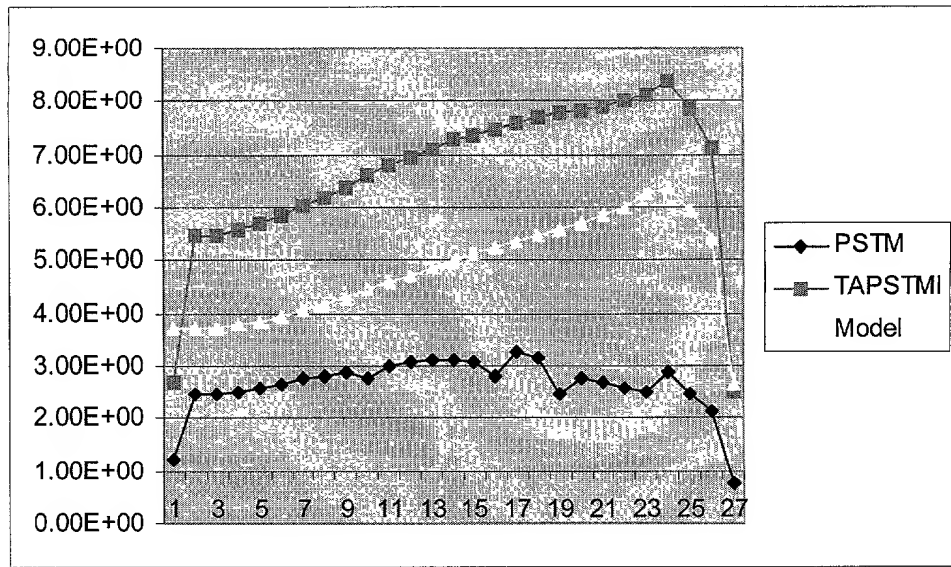


Fig. 7.

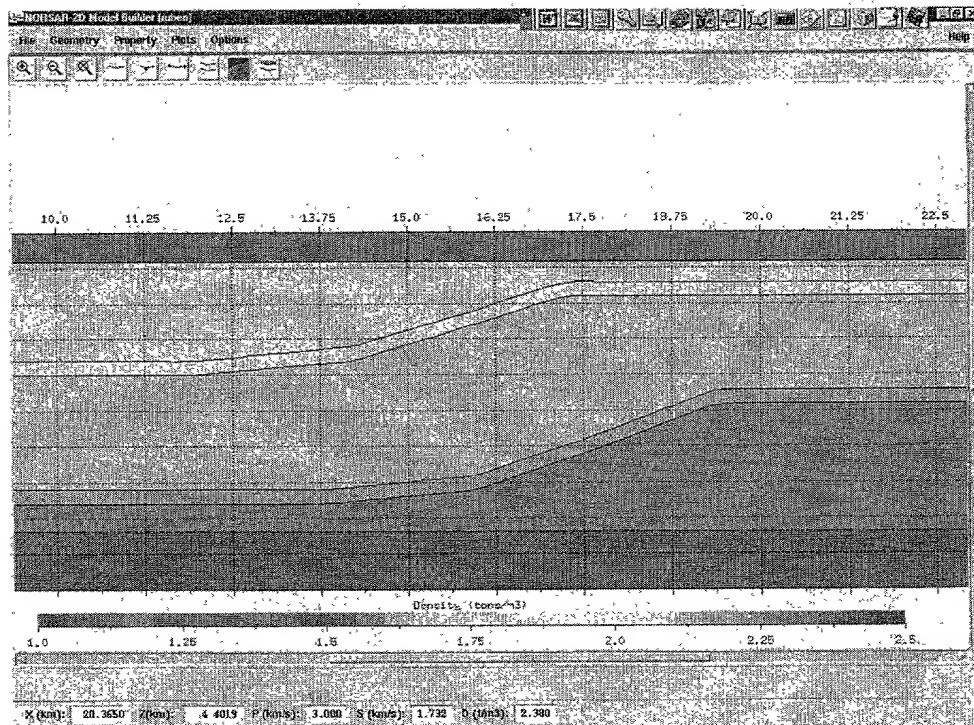


Fig. 8.

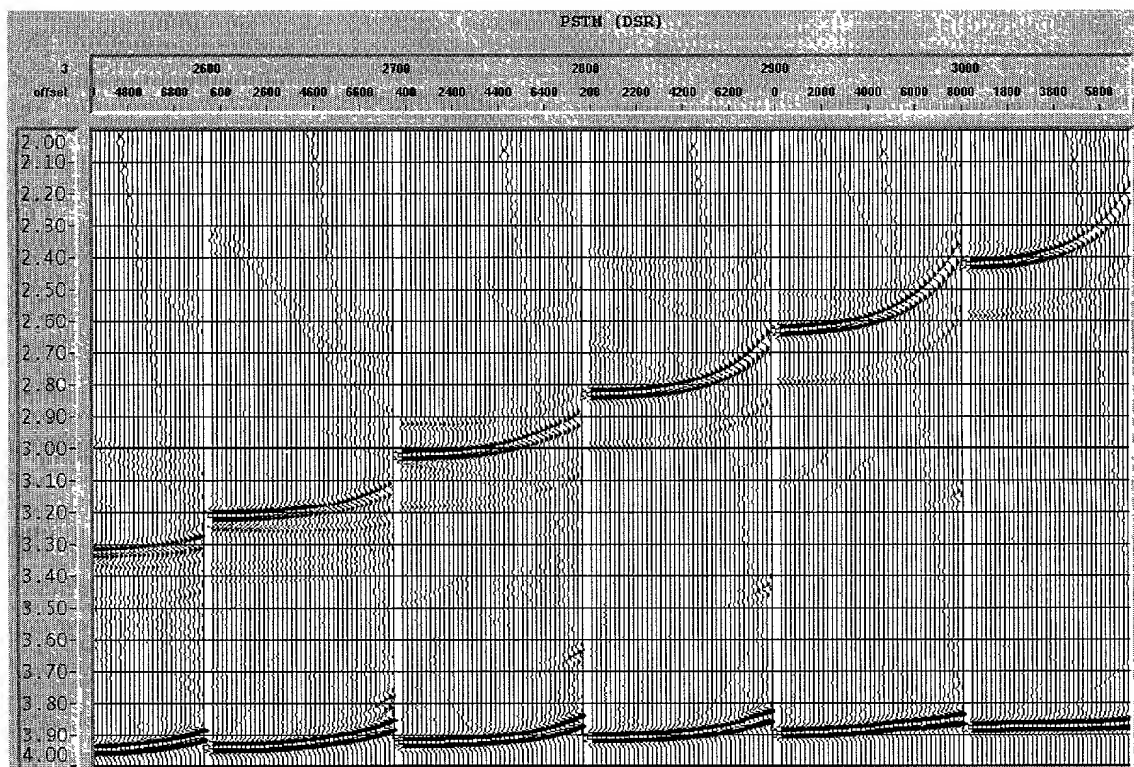


Fig. 9.

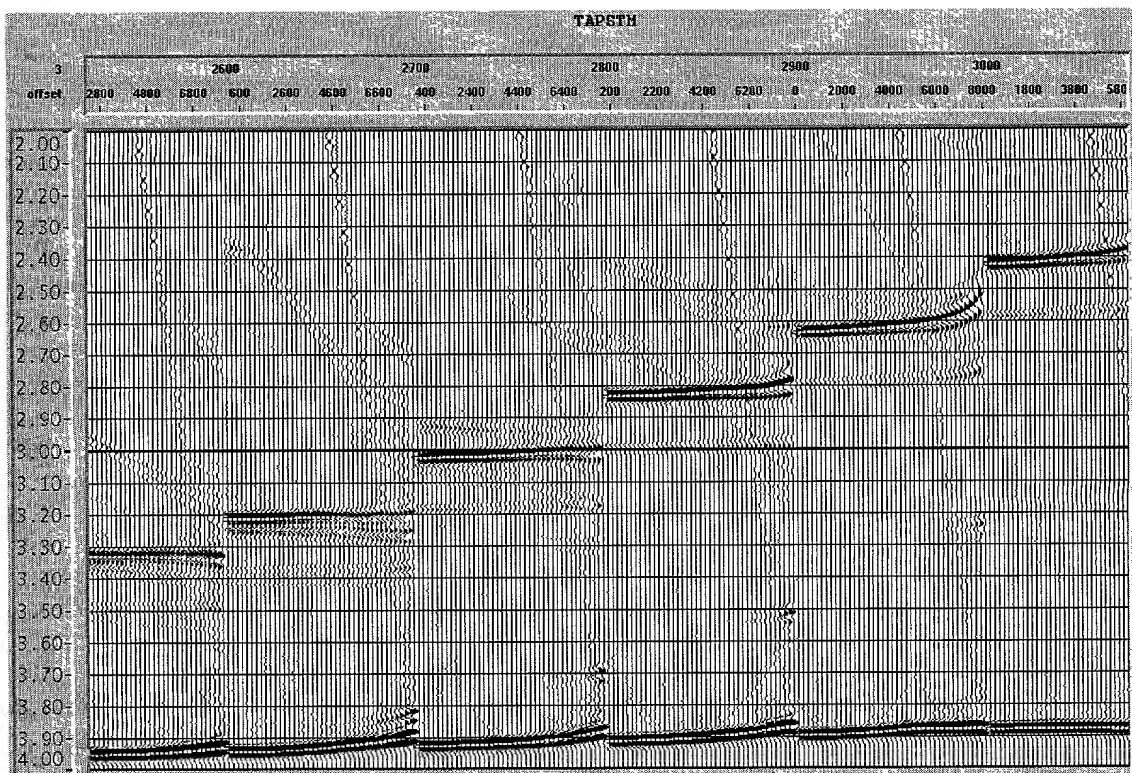


Fig. 10.

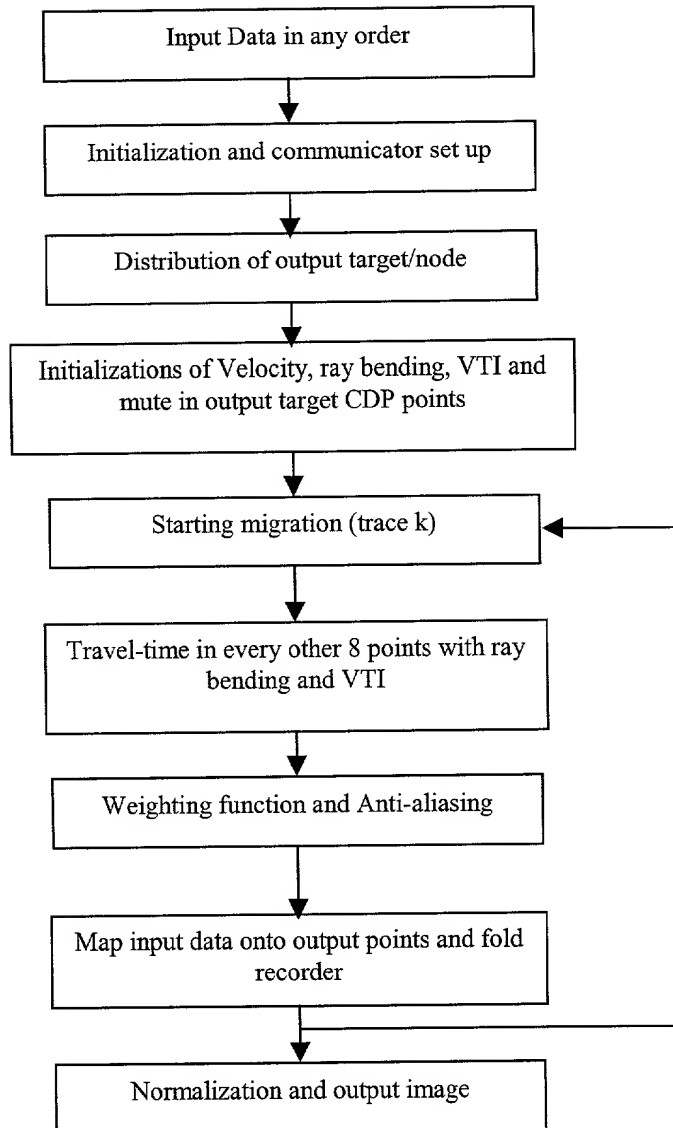


Fig 11.